

Recommended shaft tolerances ISO g6

Rugosity R_a 0,8 μm

Recommended Mounting

Bore Diameter $\varnothing 60.3\text{mm} \pm 0.05$

GENERAL TOLERANCES - FOR FEATURES WITHOUT SPECIFIC TOLLERANCE INDICATION ACCORDING TO ISO 2768 - mH
GENERAL TOLERANCES FOR THREADS ISO 965-1 GAS ISO 228/1

MAGERTM
AIR BEARINGS

XABR-040-RBB

RELEASE DATE

10/02/2021


CODE
WF10500040000

RELEASE
A




MEAS.UNIT
mm

MASS
0,324 kg

SCALE
1 : 2



This drawing contains information which are property of Mager srl.
Any total or partial reproduction, disclosure, copy or use of this drawing or the information contained herein is expressly prohibited without prior written permission from Mager srl.
MAGER reserves also the right to change or update his products at its sole discretion at any time and without further notice.

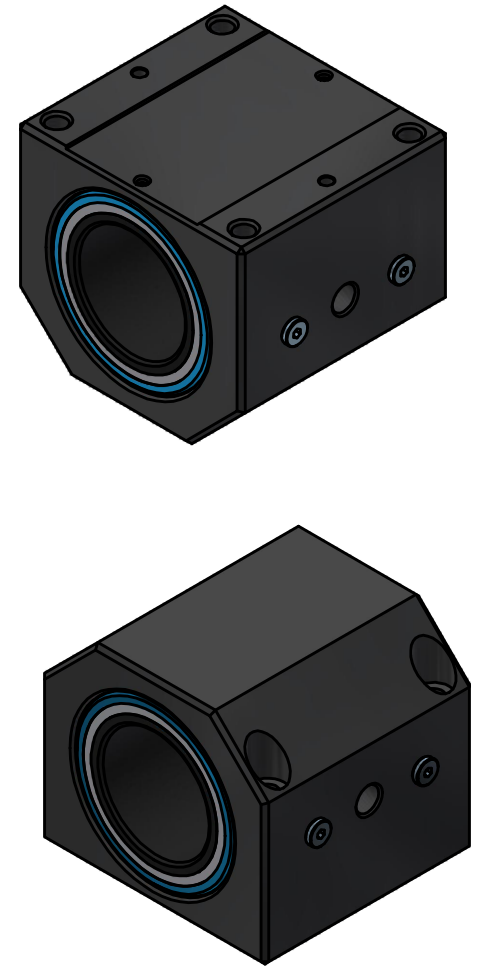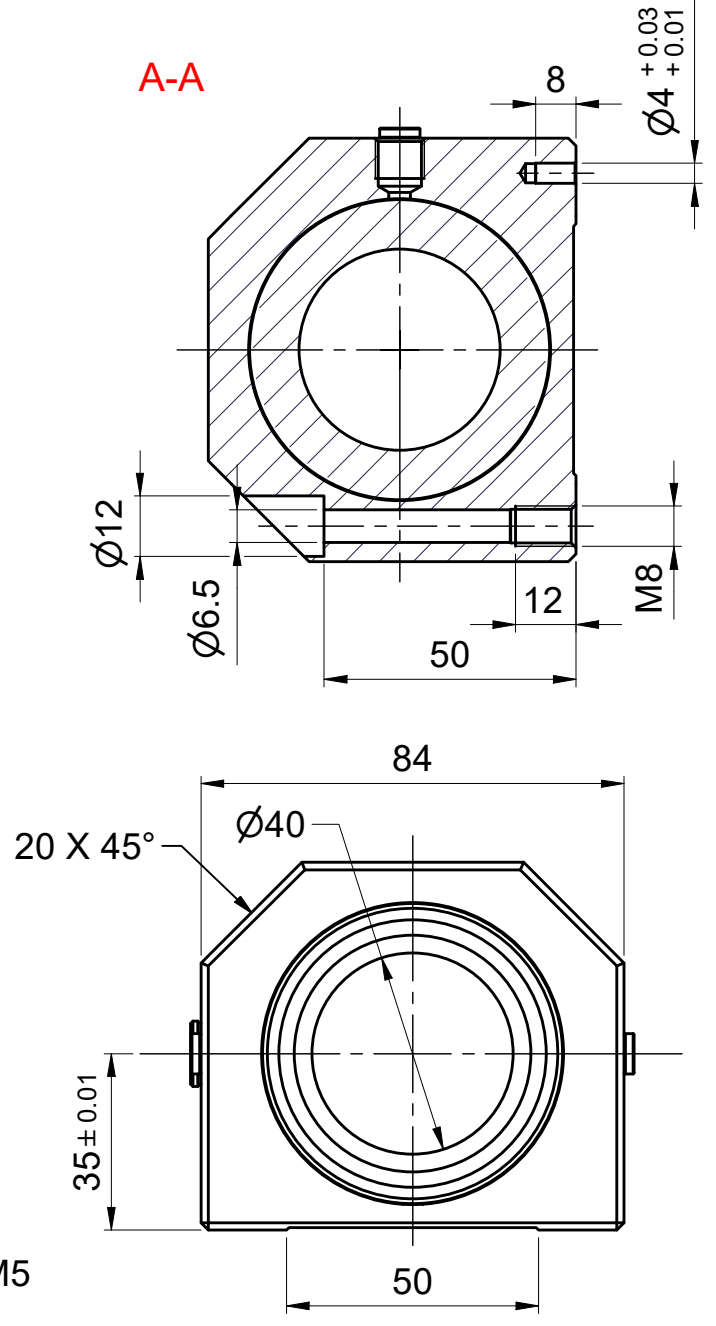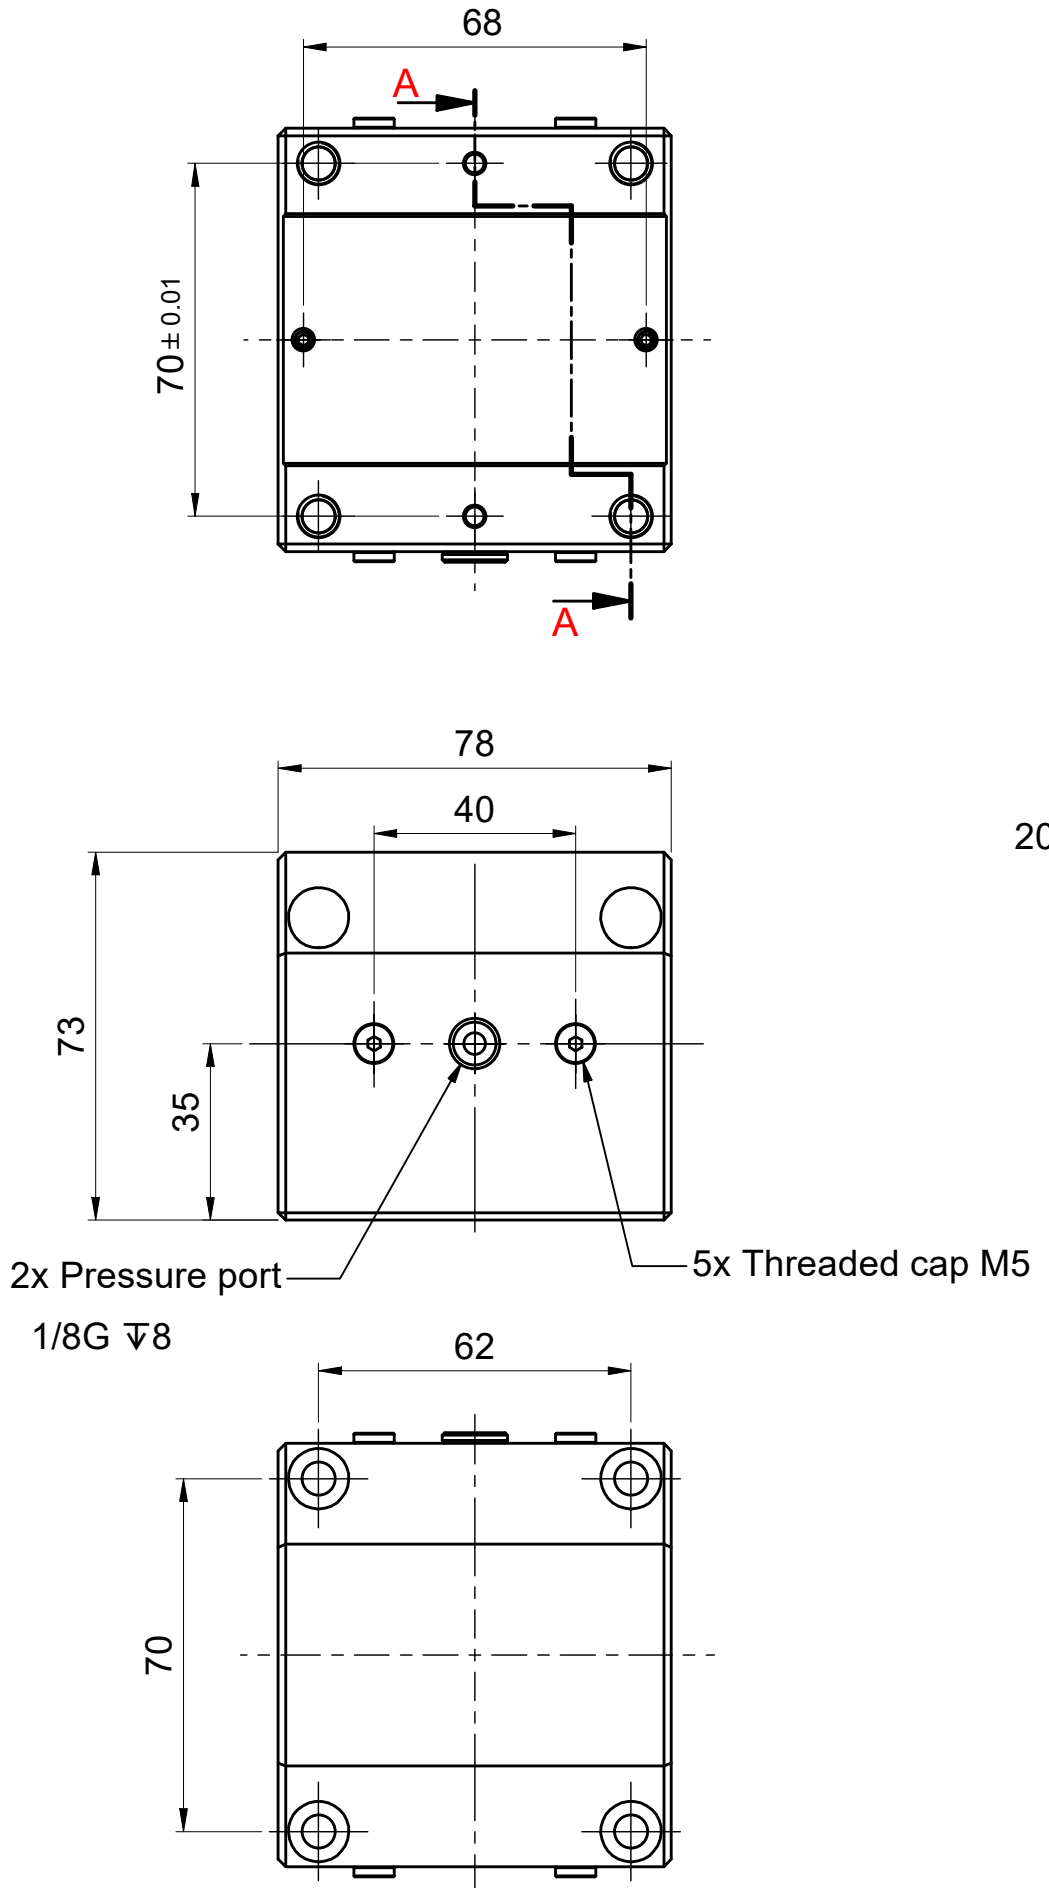

Note:
 Istruzioni di use of the following air bushing version,
 RFF: floating version; RFI: stiffened floating version;
 RFR: resin stiffened version are in a separate document.

GENERAL TOLERANCES - FOR FEATURES WITHOUT SPECIFIC TOLLERANCE INDICATION ACCORDING TO ISO 2768 - mH					
GENERAL TOLERANCES FOR THREADS ISO 965-1 GAS ISO 228/1					
	XABR-040-RFx				RELEASE DATE
					05/05/2022
CODE	RELEASE	MEAS. UNIT	MASS	SCALE	
WF10500040100	A	mm	0,885 kg	1 : 1.5	

This drawing contains information which are property of Mager srl.
 Any total or partial reproduction, disclosure, copy or use of this drawing or the information contained herein is expressly prohibited without prior written permission from Mager srl.
 MAGER reserves also the right to change or update his products at its sole discretion at any time and without further notice.